
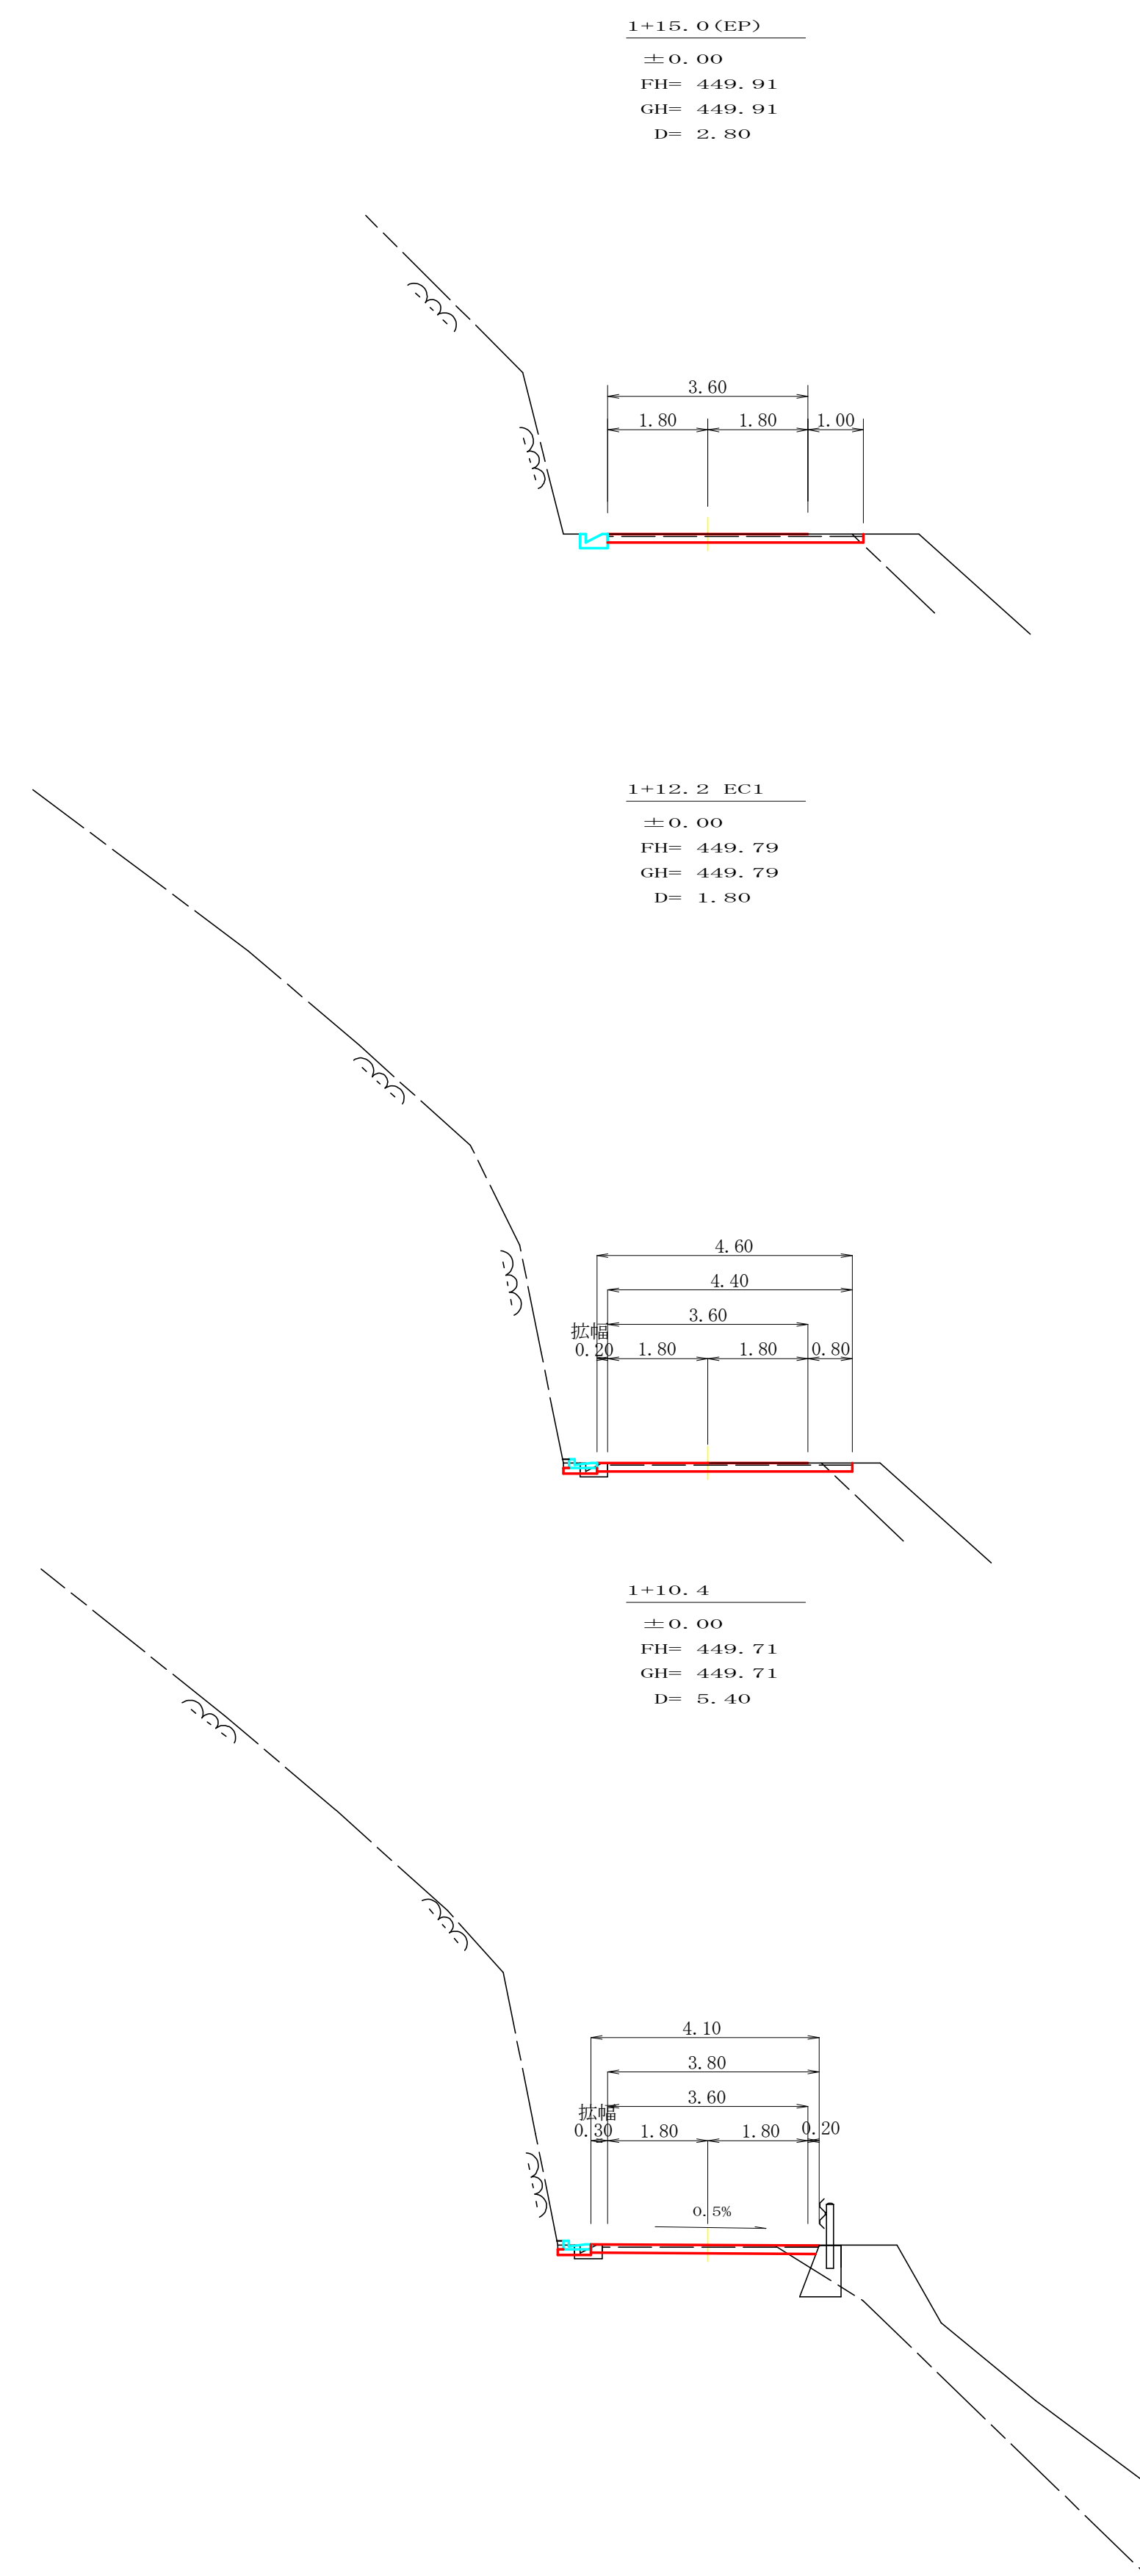
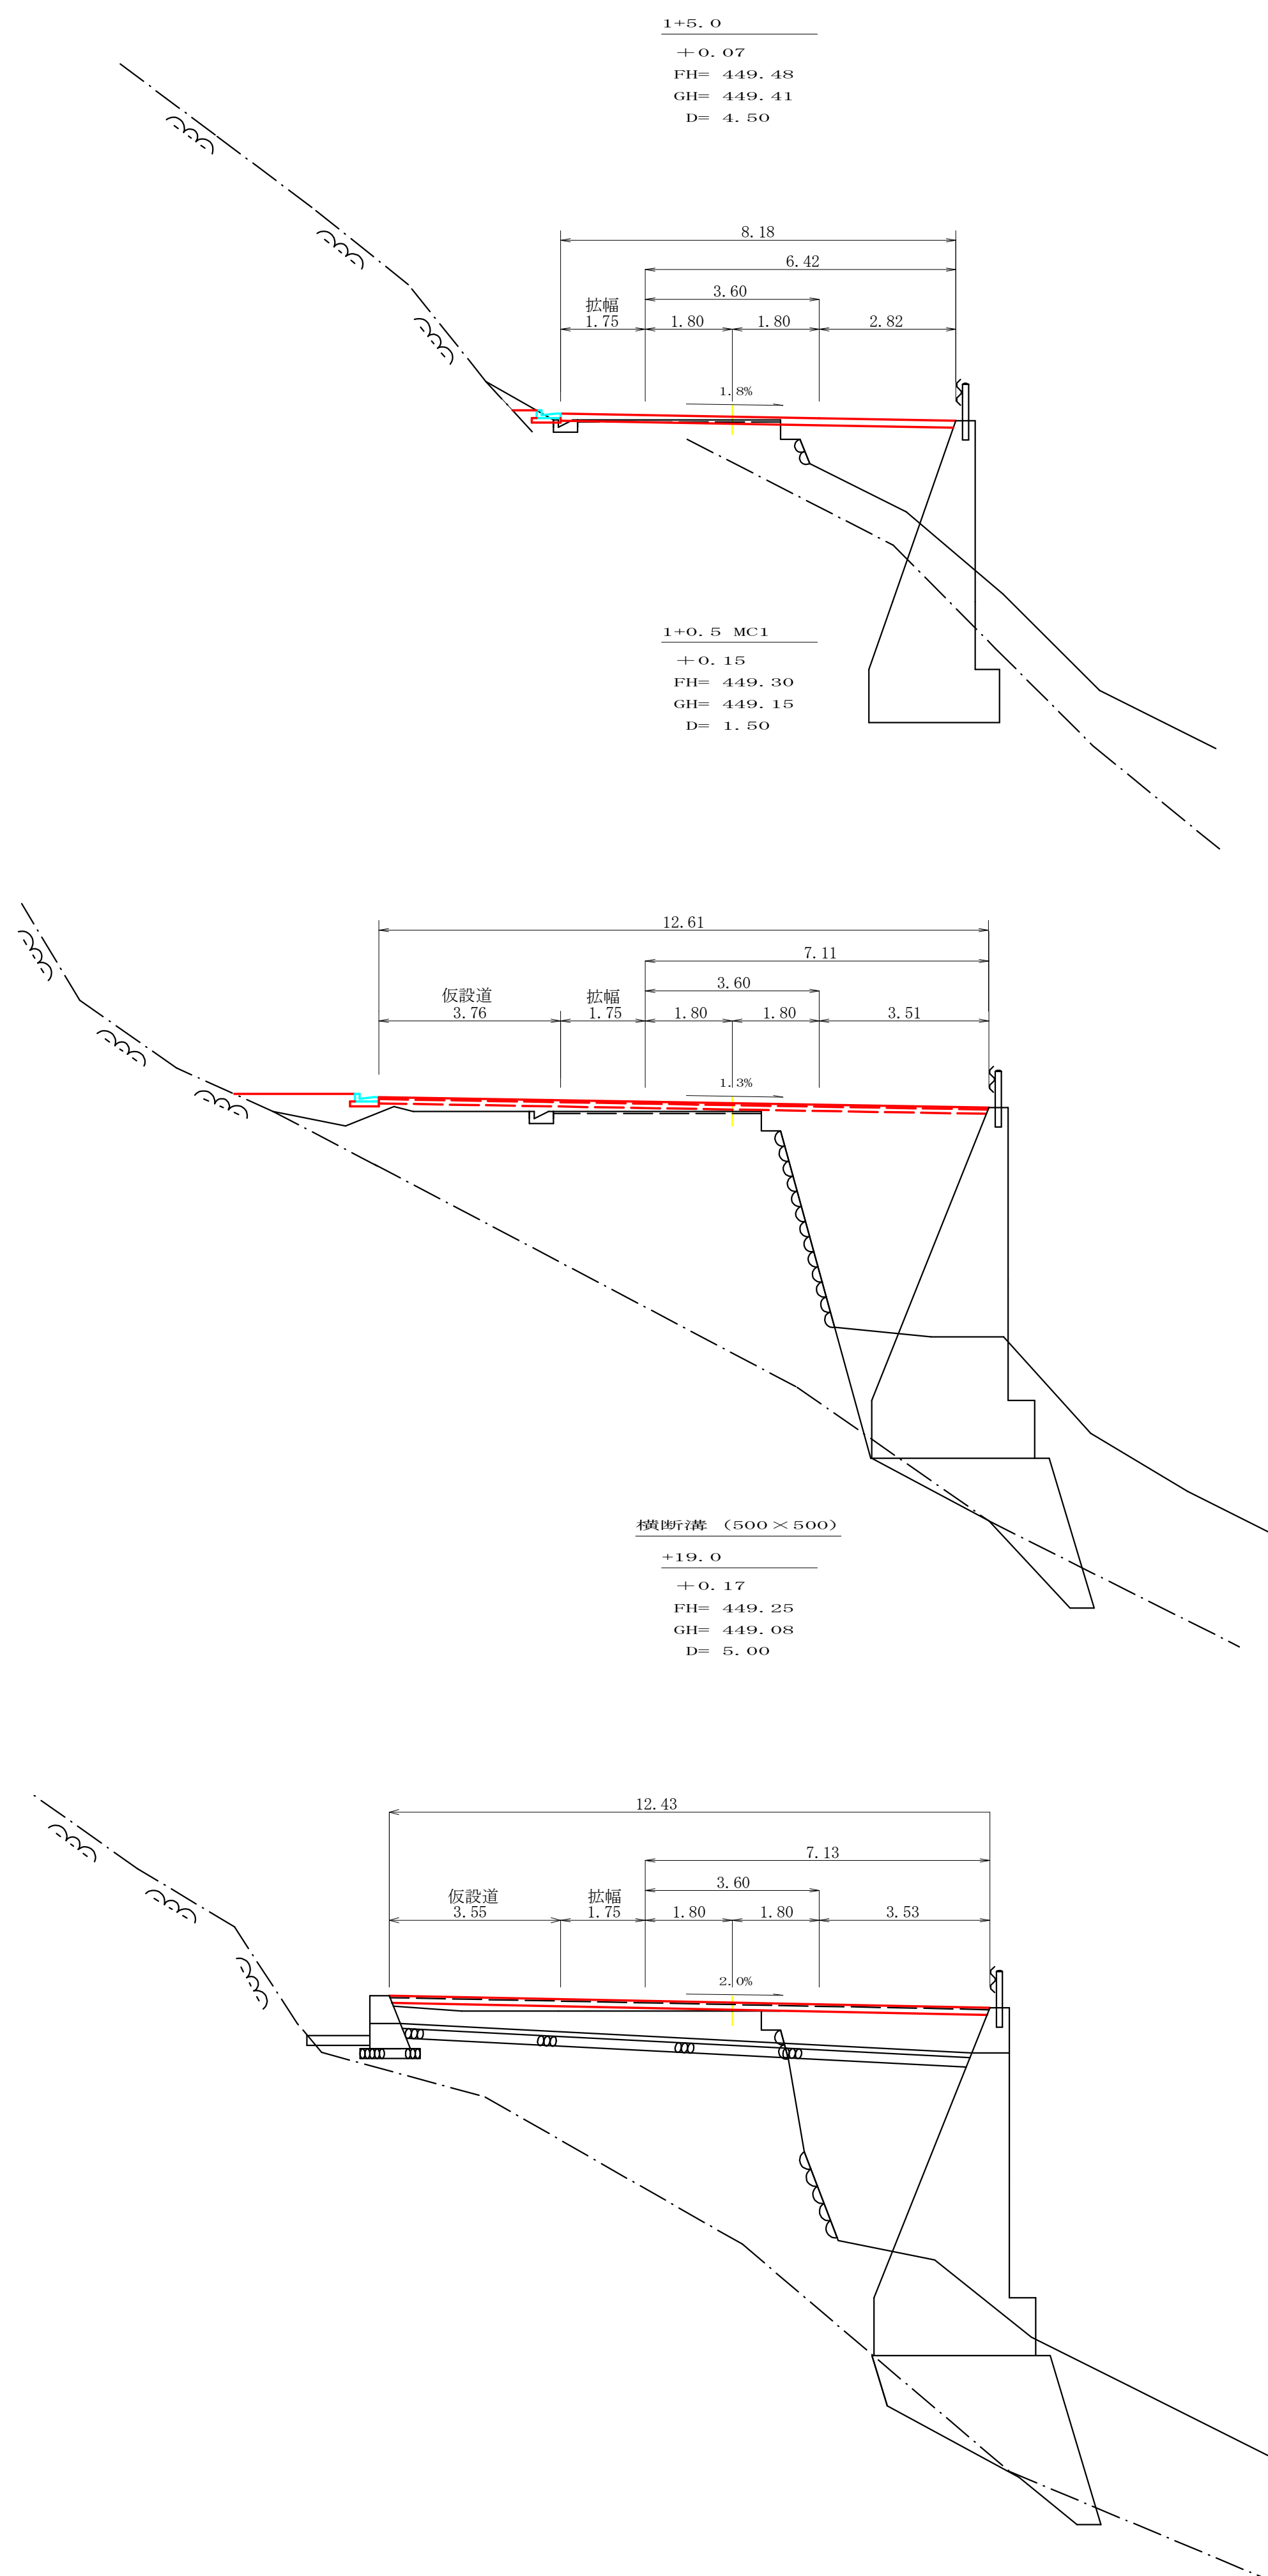




Figure 1: A cross-section diagram of a road and drainage system. The diagram shows a road cross-section with a centerline (DL=445.000) and a proposed drainage ditch (R 6 施工). The ditch is 500x500 mm and is located 19.0 m from the centerline. The ditch is labeled "BM GH=450.000 L 型側溝鉋天". The diagram also shows a vertical curve (VC=20.0M) and a slope of 1:100. The diagram is labeled "1:100" and "DL=445.000".


測点番号	単距離	追加距離	盛土高	切土高	地盤高	計画高	配勾
No.0 (BP)	0.00	0.00	0.00	0.00	449.01	449.01	
+5.0	5.00	5.00	0.01		449.00	449.01	
+8.8 BC1	3.80	8.80	0.04		448.99	449.03	
+14.0	5.20	14.00	0.20		448.92	449.12	
+19.0	5.00	19.00	0.17		449.08	449.14	
1+0.5 MC1	1.50	20.50	0.15		449.15	449.30	
1+5.0	4.50	25.00	0.07		449.41	449.48	
1+10.4	5.40	30.40	0.00		449.71	449.71	
1+12.2 EC1	1.80	32.20	0.00		449.79	449.79	
1+15.0 (EP)	2.80	35.00	0.00	0.00	449.91	449.91	

路 線 名	南川	線	事 業 名	県単林道事業		
林道区分	森林管理道		級別区分	2 級	設計速度	2 0 km/h
年 度	令和 7 年度		施行主体	那賀町		
名 称	平面・縦断面図	1	集 中	1	番	
施 行 地	徳島県 那賀郡 那賀町					
縮 尺	1/100		図面番号	3	-	1
審 査 者			設 計 者			
測 点	No.0 ～ No.1+15.0					

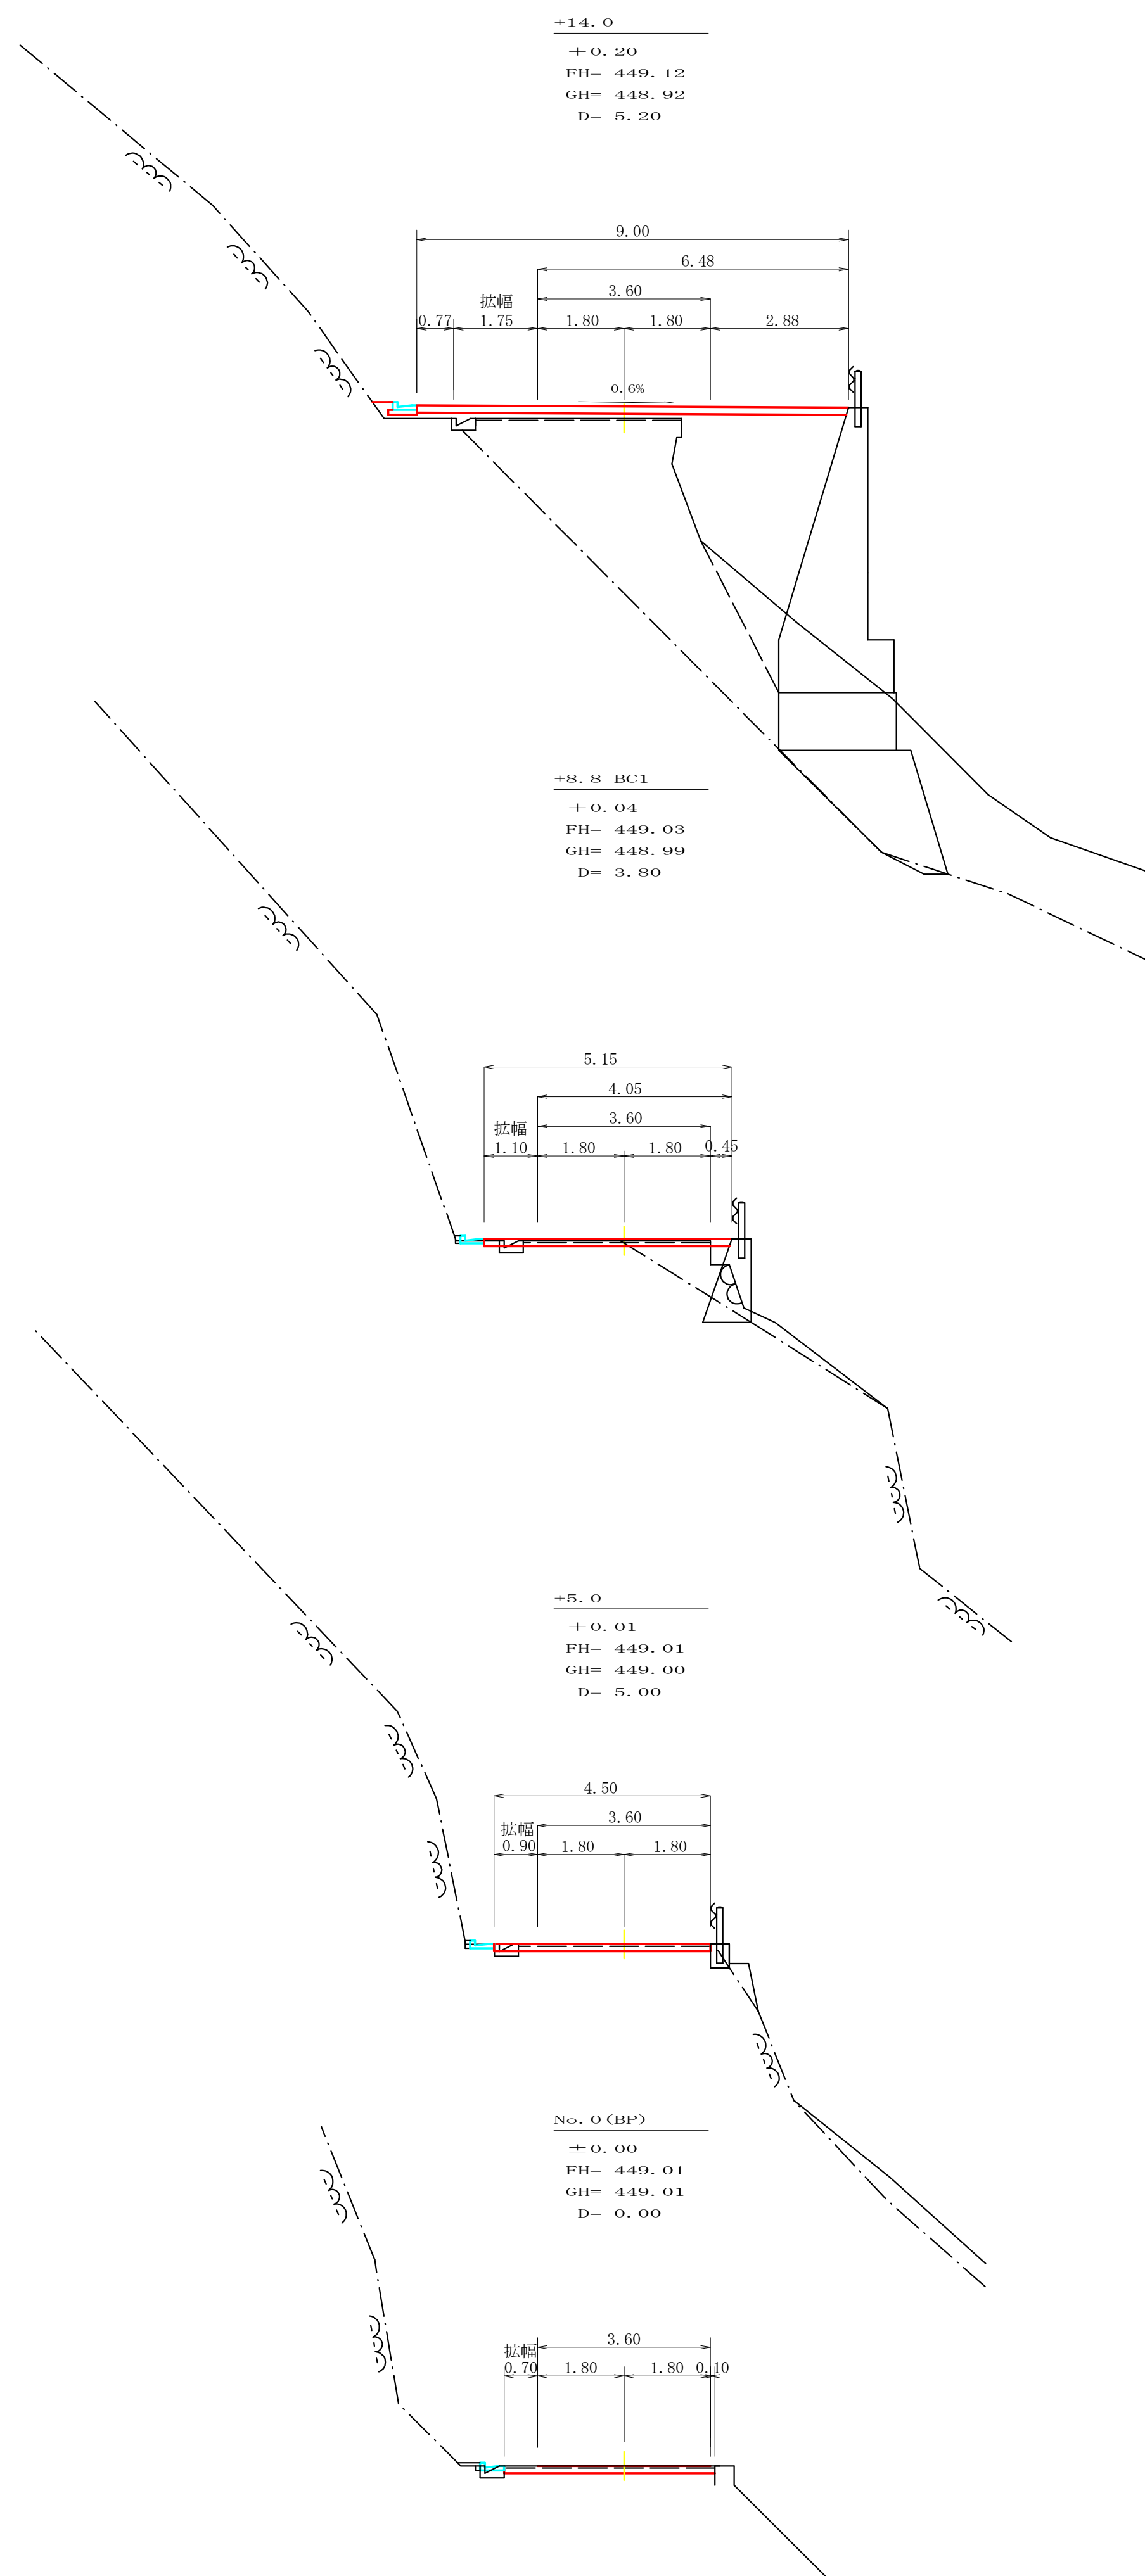

路 線 名	南川	線	事 業 名	県単林道事業		
林道区分	森林管理道	級別区分	2 級	設計速度	2 0 km/h	
年 度	令和 7 年度	施行主体	那賀町			
名 称	横断図面	1	葉中	1	番	
施 行 地	徳島県 那賀郡 那賀町					
縮 尺	1/100	図面番号	3 - 2			
審 査 者		設 計 者				
測 点	No.0 ～ No.1+15.0					

既設構造物取壊し工展開図 S=1/100

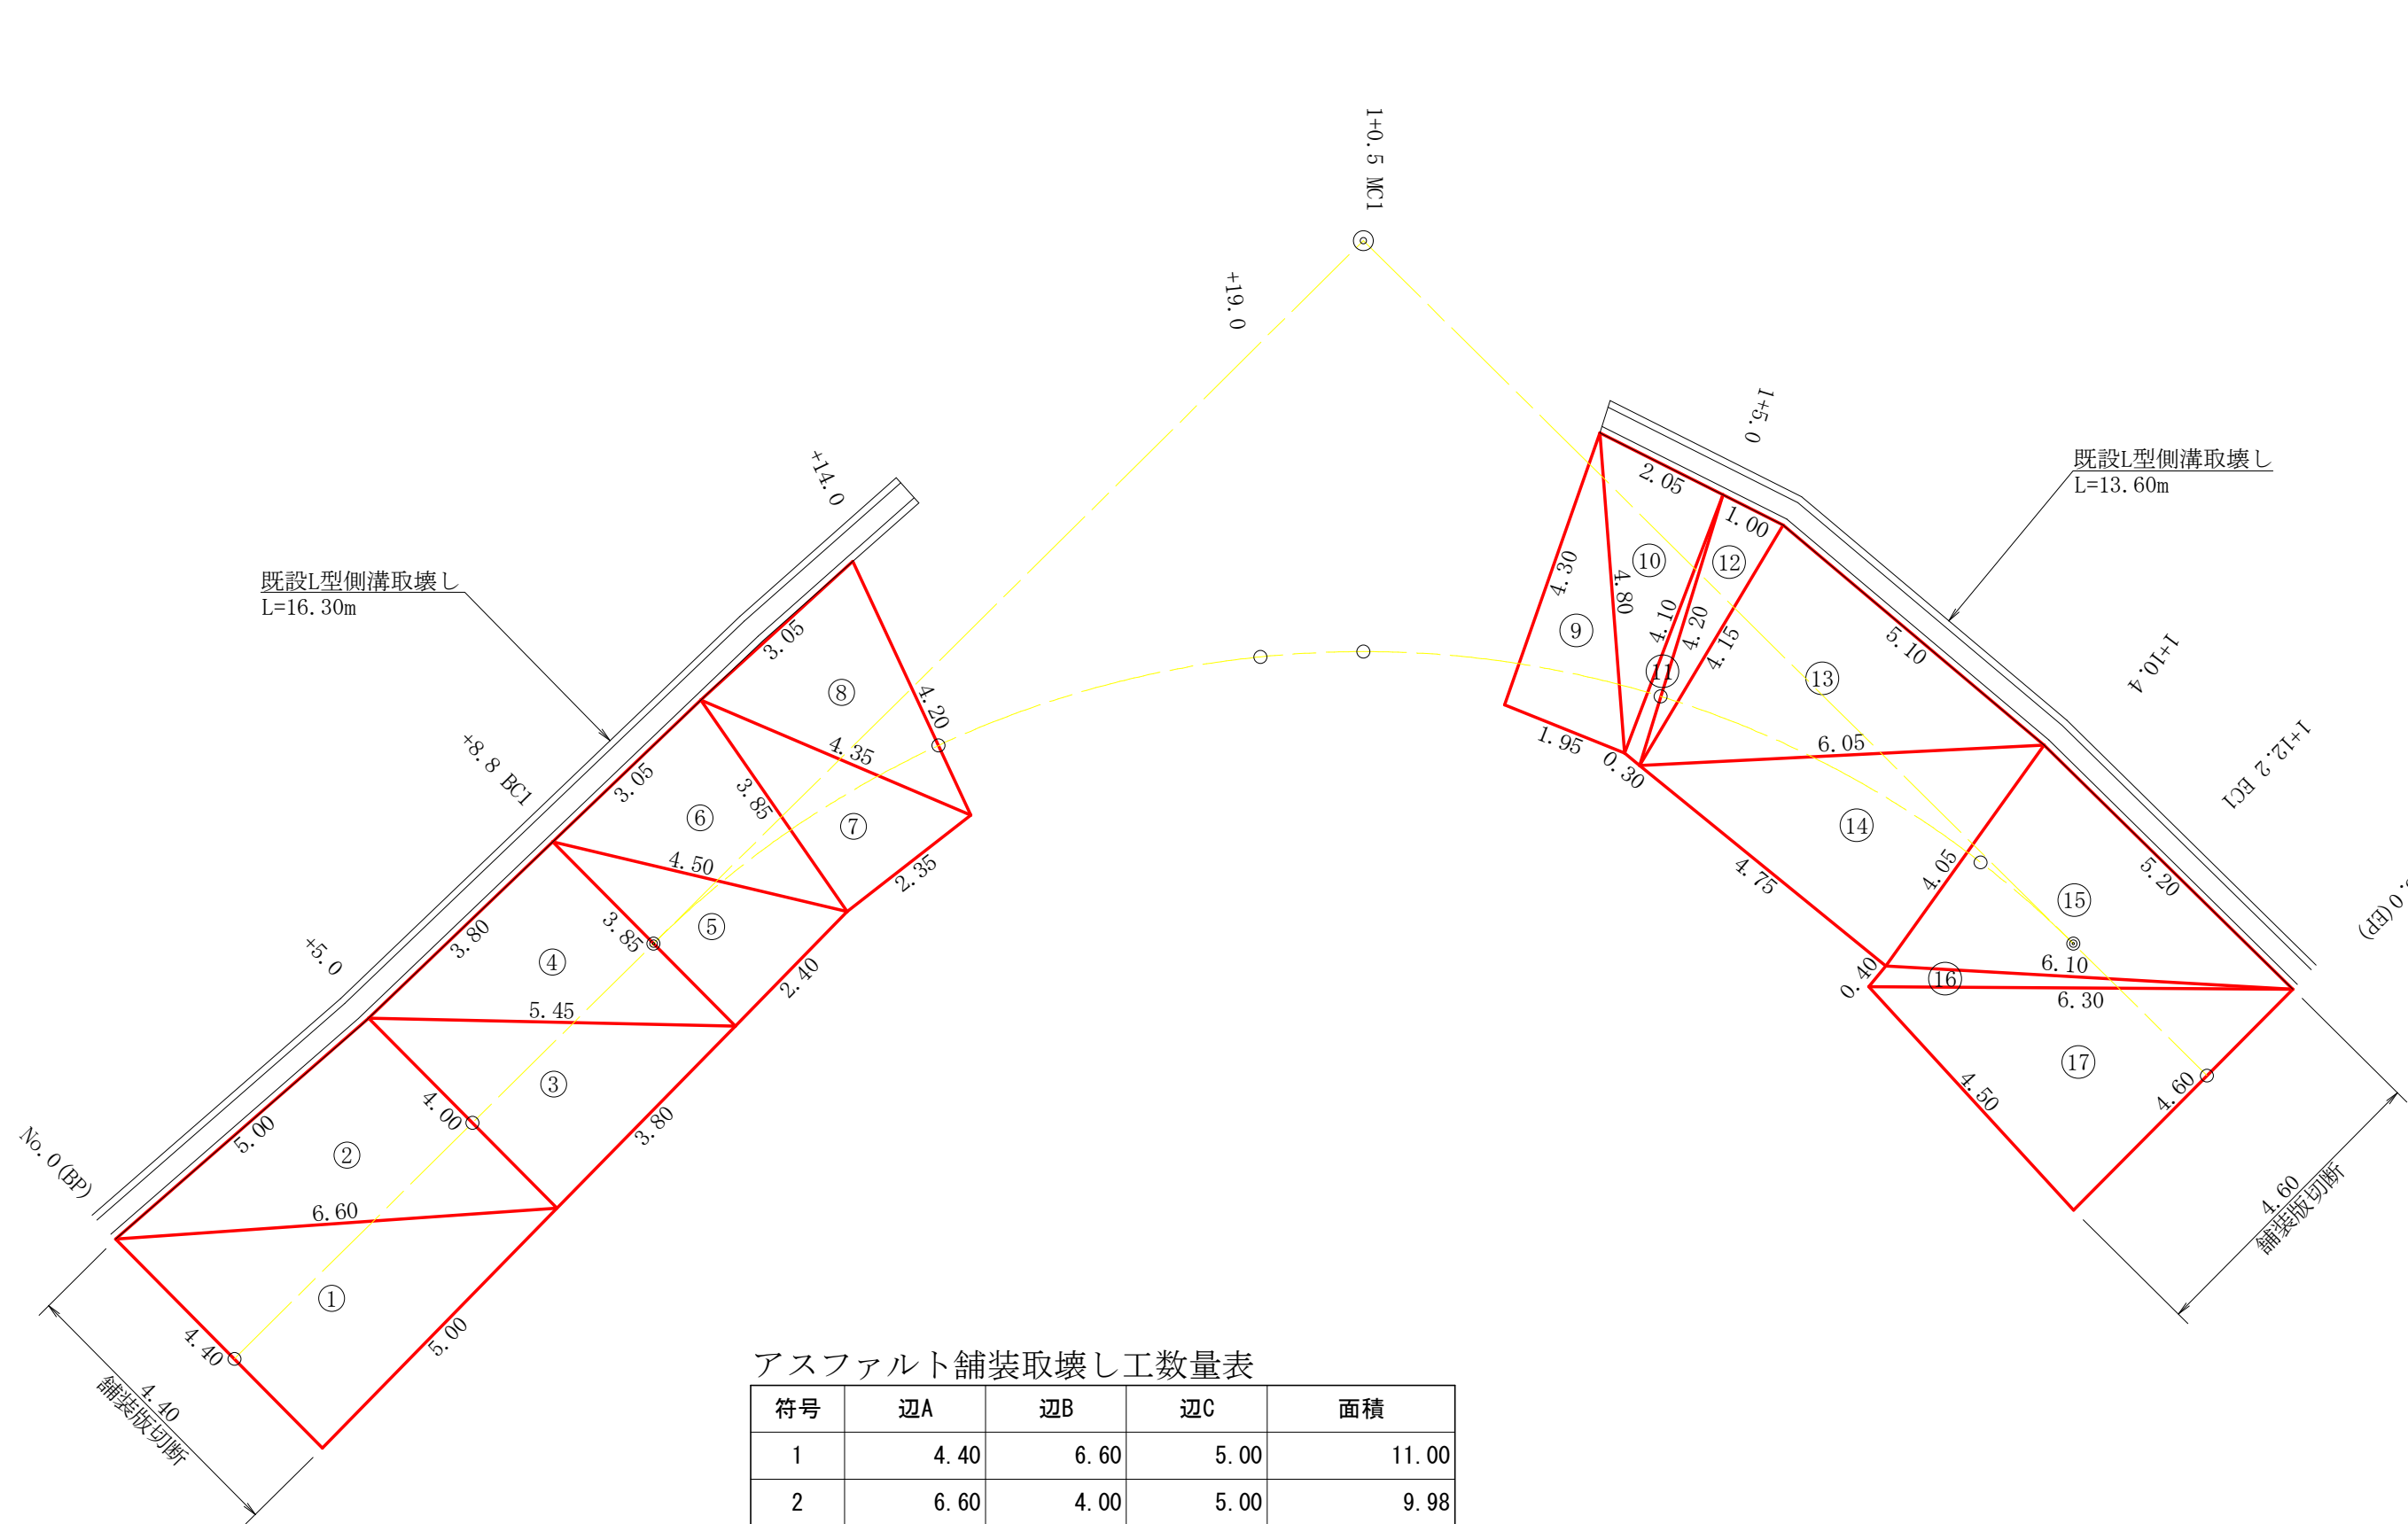


アスファルト舗装取壊し工数量表

符号	辺A	辺B	辺C	面積
1	4.40	6.60	5.00	11.00
2	6.60	4.00	5.00	9.98
3	4.00	5.45	3.80	7.60
4	5.45	3.85	3.80	7.31
5	3.85	4.50	2.40	4.62
6	4.50	3.85	3.05	5.79
7	3.85	4.35	2.35	4.51
8	4.35	4.20	3.05	6.08
9	4.30	4.80	1.95	4.19
10	4.80	4.10	2.05	4.17
11	4.10	4.20	0.30	0.59
12	4.20	4.15	1.00	2.07
13	4.15	5.10	6.05	10.45
14	6.05	4.05	4.75	9.60
15	4.05	6.10	5.20	10.41
16	6.10	6.30	0.40	1.07
17	6.30	4.50	4.65	10.34
合計				109.78

アスファルト舗装工数量表

舗装版切断	4.40+4.60	9.00 m
舗装版破碎	t=4cm	109.78 m ²
運搬処理工	109.78×0.04	4.39 m ³
産業廃棄物	4.39×2.30	10.10 t

コンクリート路面工展開図 S=1/100

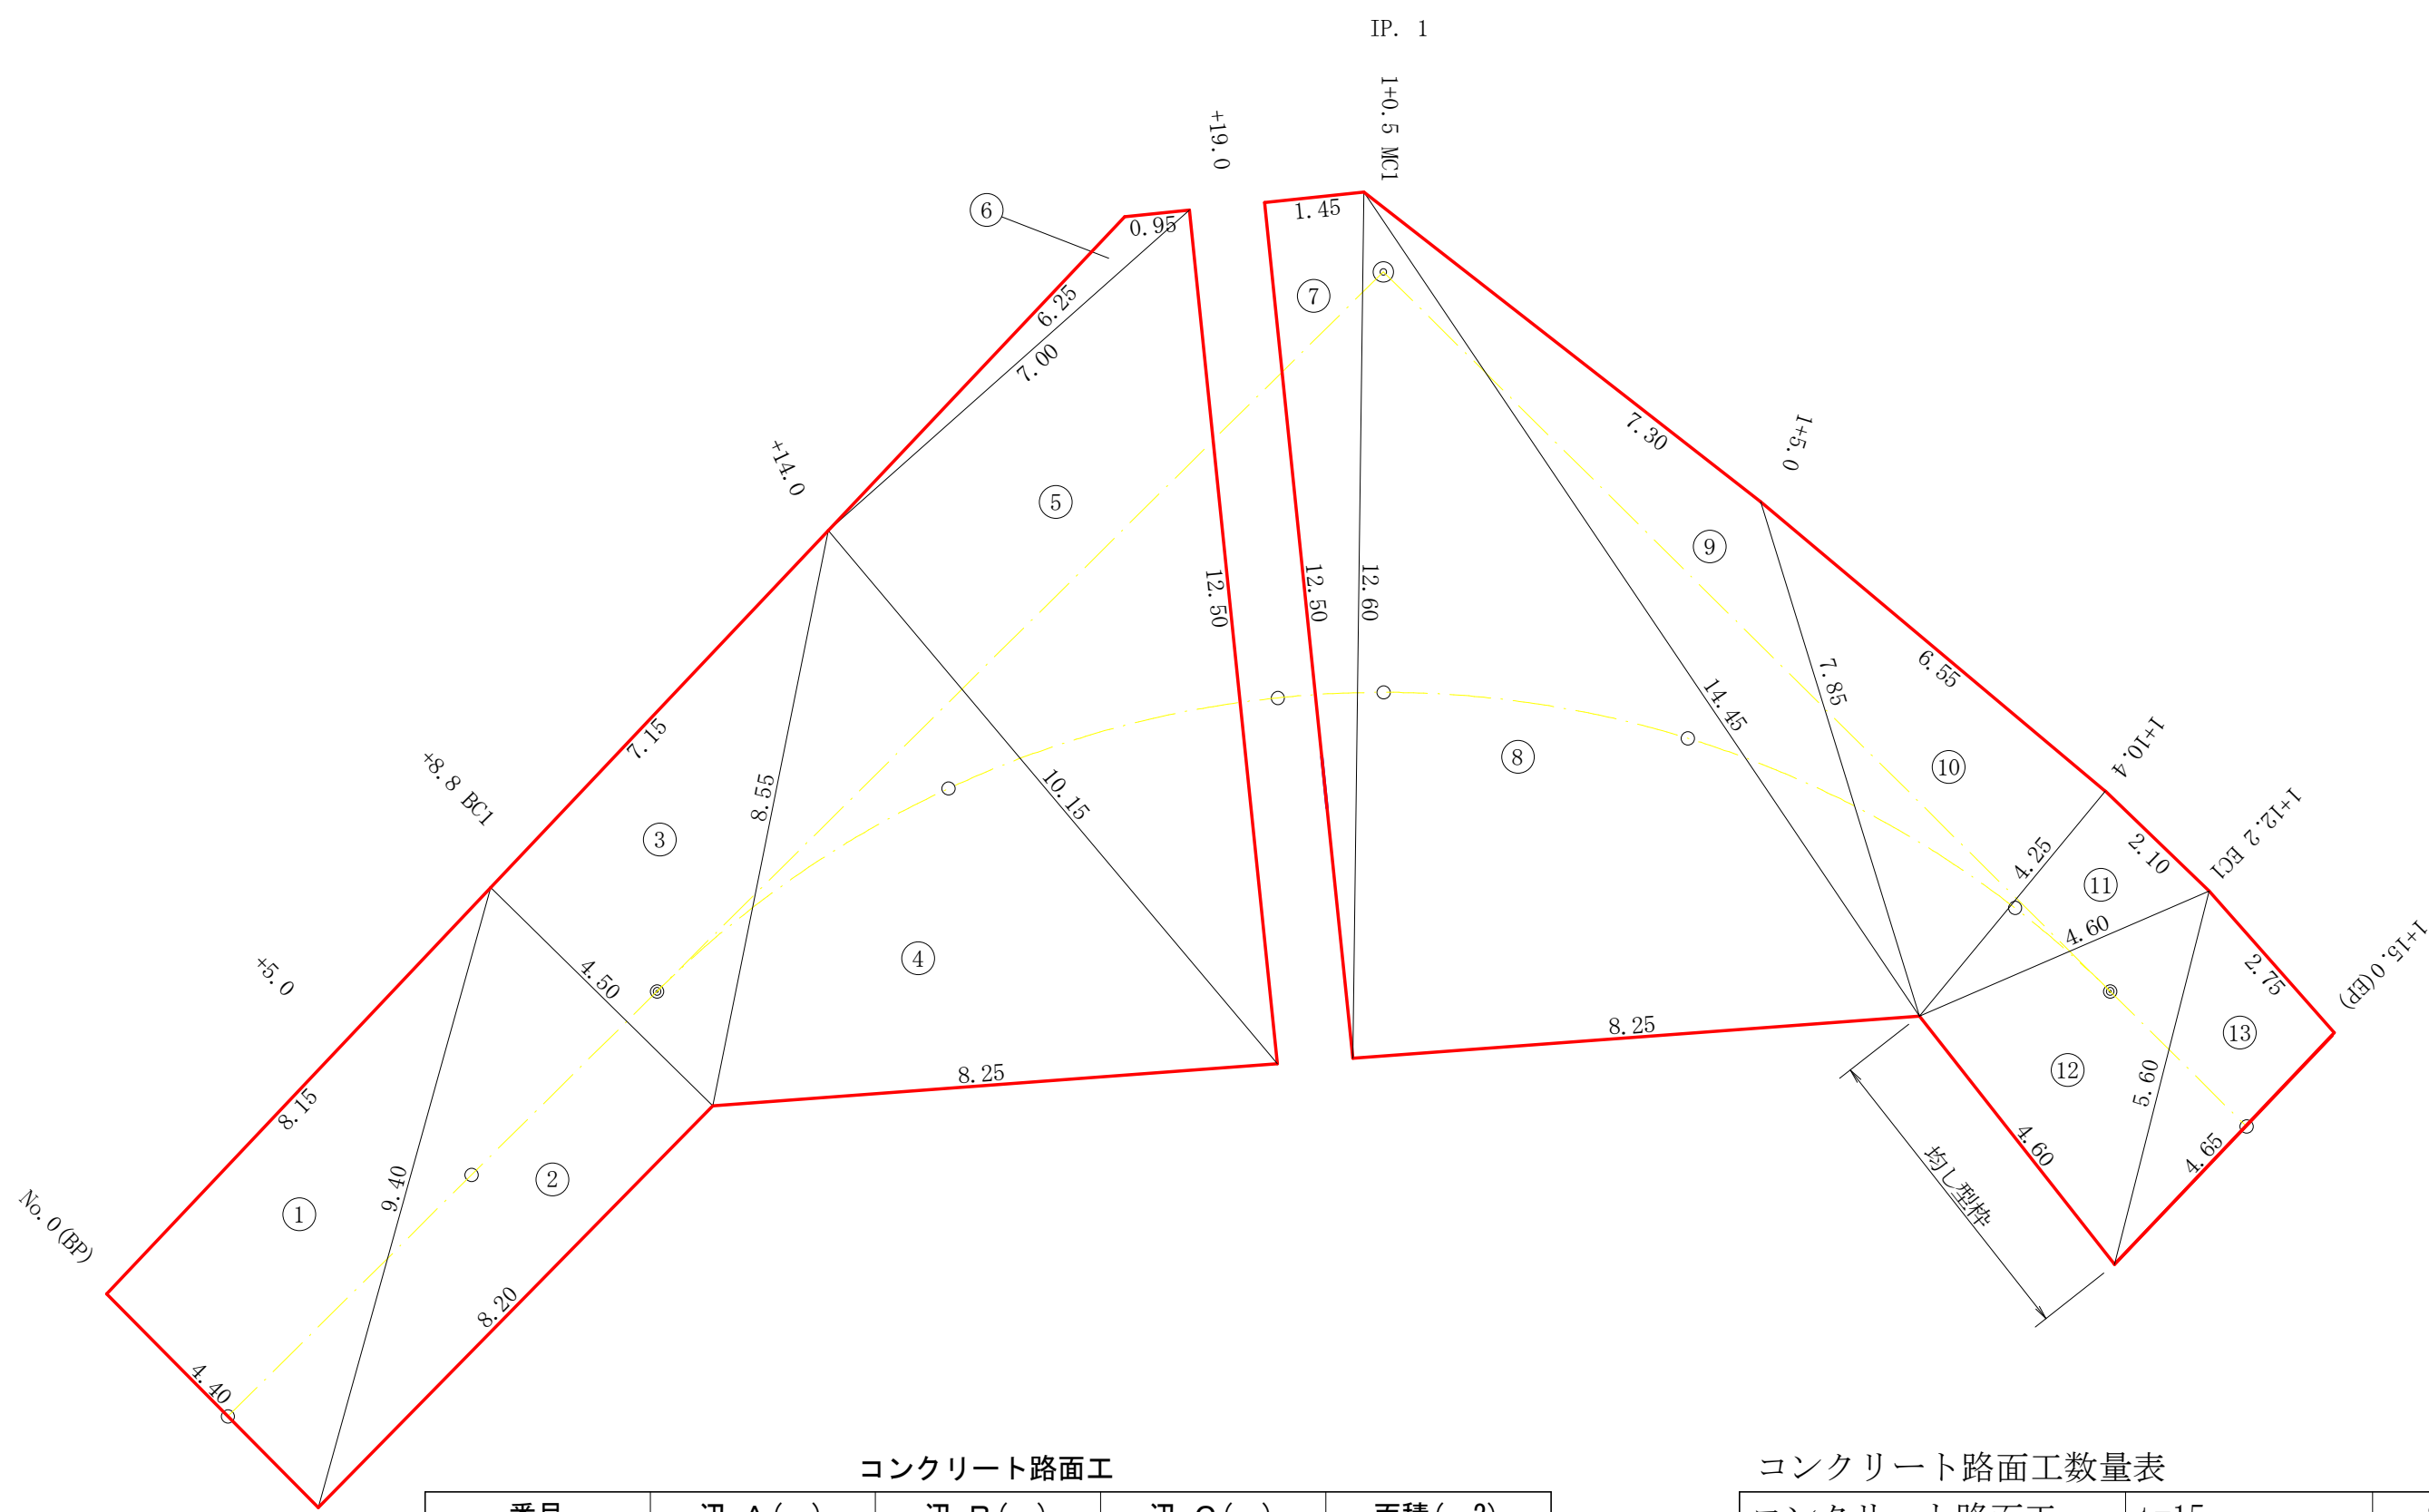


コンクリート路面工

番号	辺 A (m)	辺 B (m)	辺 C (m)	面積 (m ²)
1	4.40	8.15	9.40	17.92
2	9.40	8.20	4.50	18.45
3	4.50	7.15	8.55	16.08
4	8.55	8.25	10.15	33.96
5	10.15	7.00	12.50	35.51
6	7.00	6.25	0.95	1.93
7	12.50	1.45	12.60	9.06
8	12.60	8.25	14.45	51.78
9	14.45	7.30	7.85	16.43
10	7.85	6.55	4.25	13.92
11	4.25	2.10	4.60	4.45
12	4.60	4.60	5.60	10.22
13	5.60	2.75	4.65	6.37
合計				236.08

コンクリート路面工数量表

コンクリート路面工	t=15cm	236.08 m ²
溶接金網	φ 6 150×150	214.83 m ²
目地材	58.45×0.15	8.77 m ²
均し型枠	4.60×0.15	0.69 m ²


L型側溝取壊し
SC:1/20

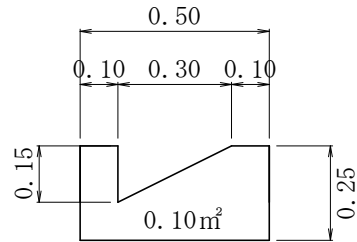

L型側溝取壊し工数量表

延長	16.30+13.60	29.90 m
コンクリート	0.10×29.90	2.99 m ³
産業廃棄物	2.99×2.35	7.03 t


新設L型側溝（現場打）
SC:1/20

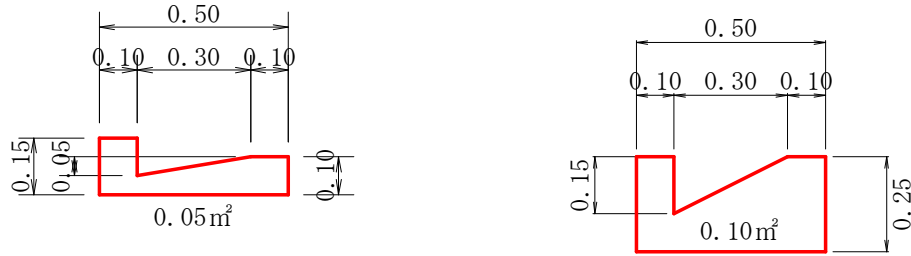

新設L型側溝（現場打）工数量表

延長	1.60+1.20	2.80 m
コンクリート	1/2 (0.05+0.10) × 2.80	0.21 m ³
小型型枠	1/2 (0.50+1.00) × 2.80	2.10 m ²
基面整正	0.50 × 2.80	1.40 m ²

鉄筋コンクリートL型（PL2型 300）
S=1/10

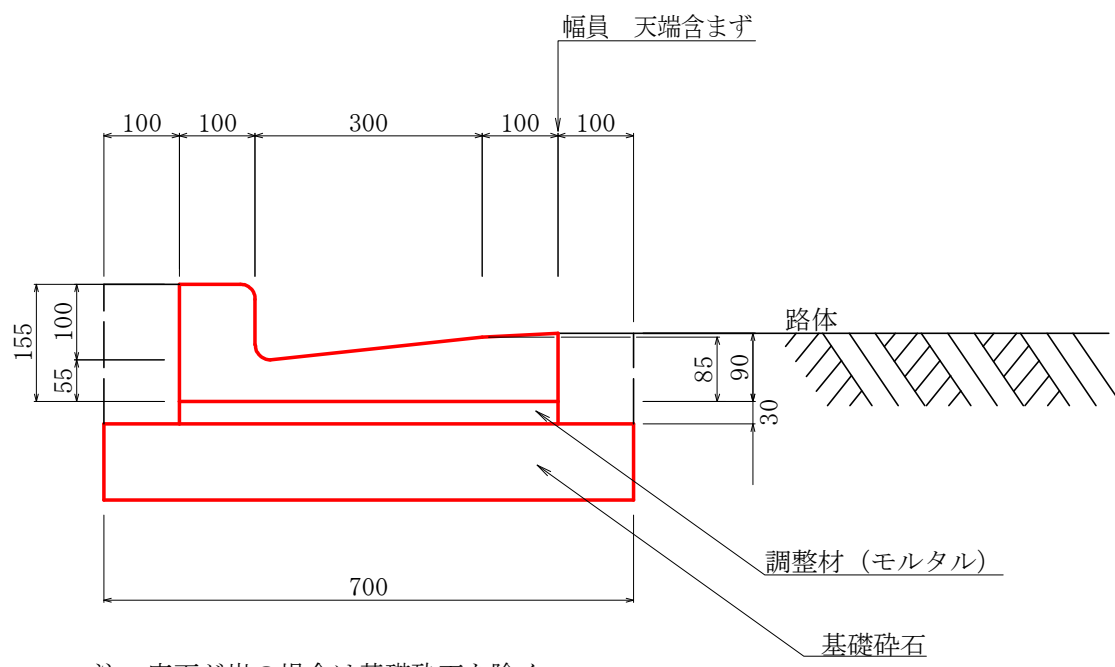


注：底面が岩の場合は基礎砕石を除く


1m当り	
基礎砕石	0.700m ²
調整材	0.015m ³
床 掘	0.150m ³

測溝種類	区分	延 長	基面整正
鉄筋コンクリートL型側溝（基礎砕石有り）		20.00	14.00
鉄筋コンクリートL型側溝（基礎砕石無し）		17.00	8.50


溶接金網（φ 6.0×150×150）配置図
S=1/100

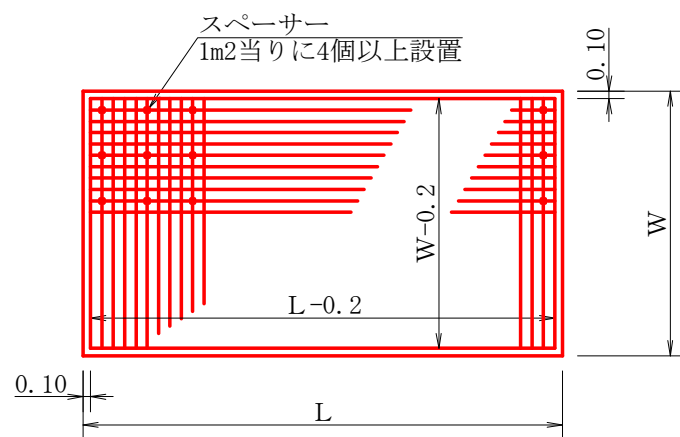

コンクリート路面工(t=15cm)標準断面図
S=1/50

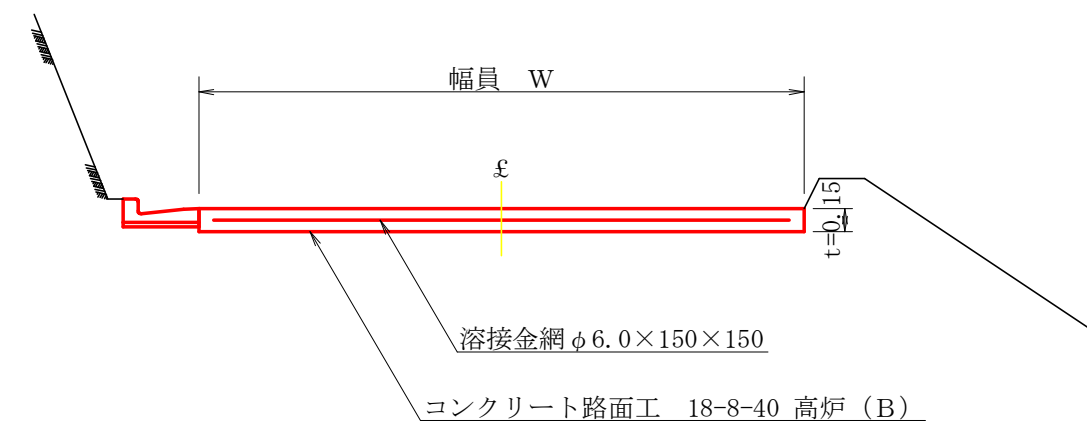

伸縮目材配置図
S=1/10

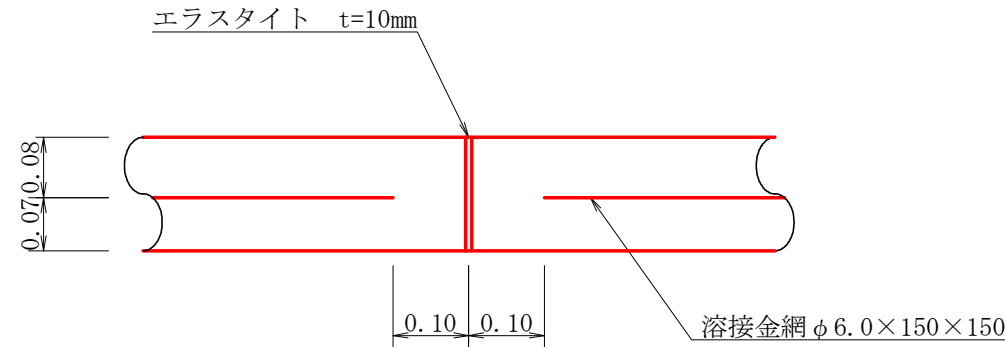

注：スベークサーは、1 m2に4個以上設置
目地は、5～10 mに1箇所施工

路 線 名	南川	線	事 業 名	県単林道事業		
林道区分	森林管理道		級別区分	2 級	設計速度	2 0 km/h
年 度	令和 7 年度		施行主体	那賀町		
名 称	コンクリート路面工展開図面			1	葉中	1 番
施 行 地	徳島県 那賀郡 那賀町					
縮 尺	図 示		図面番号		3 - 3	
審 査 者			設 計 者			
測 点	No.0 ～ No.1+15.0					